

A

B

C




D

A


B


C

D

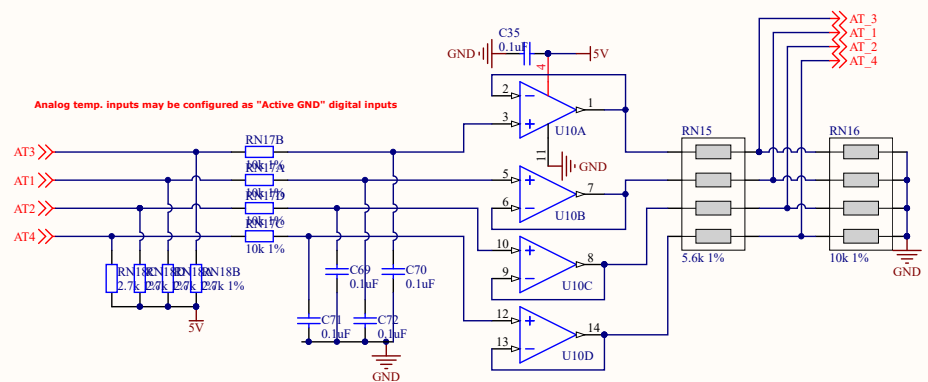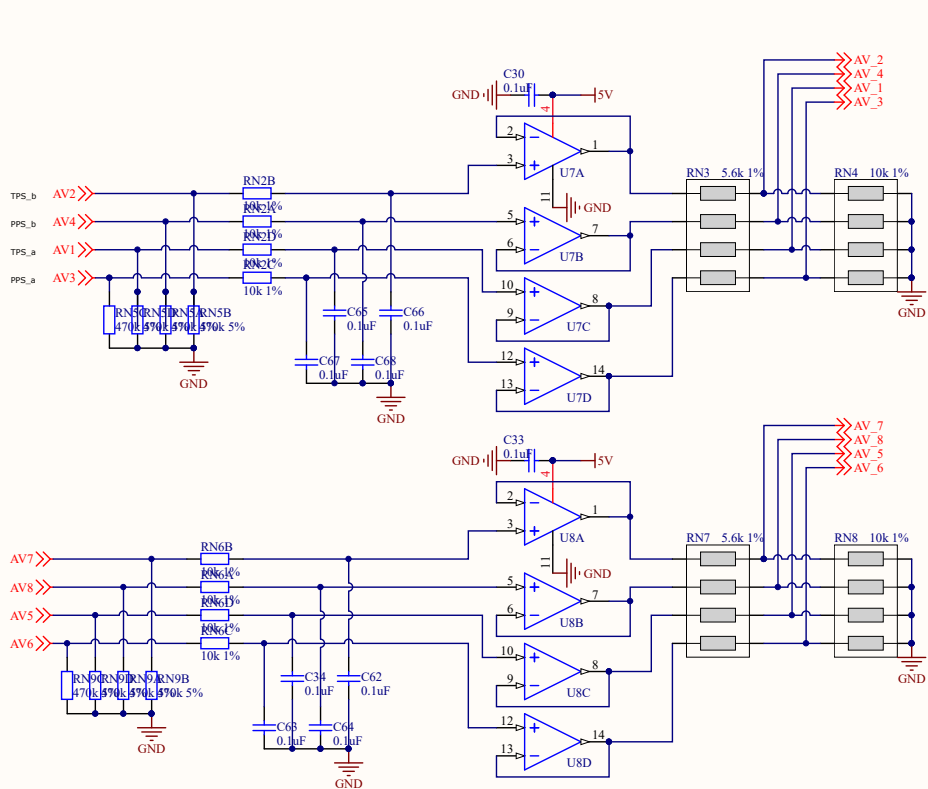

Analog temp. inputs may be configured as "Active GND" digital inputs

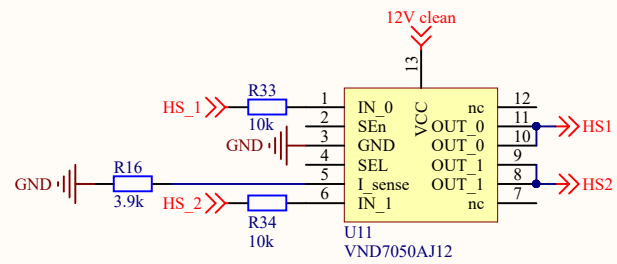

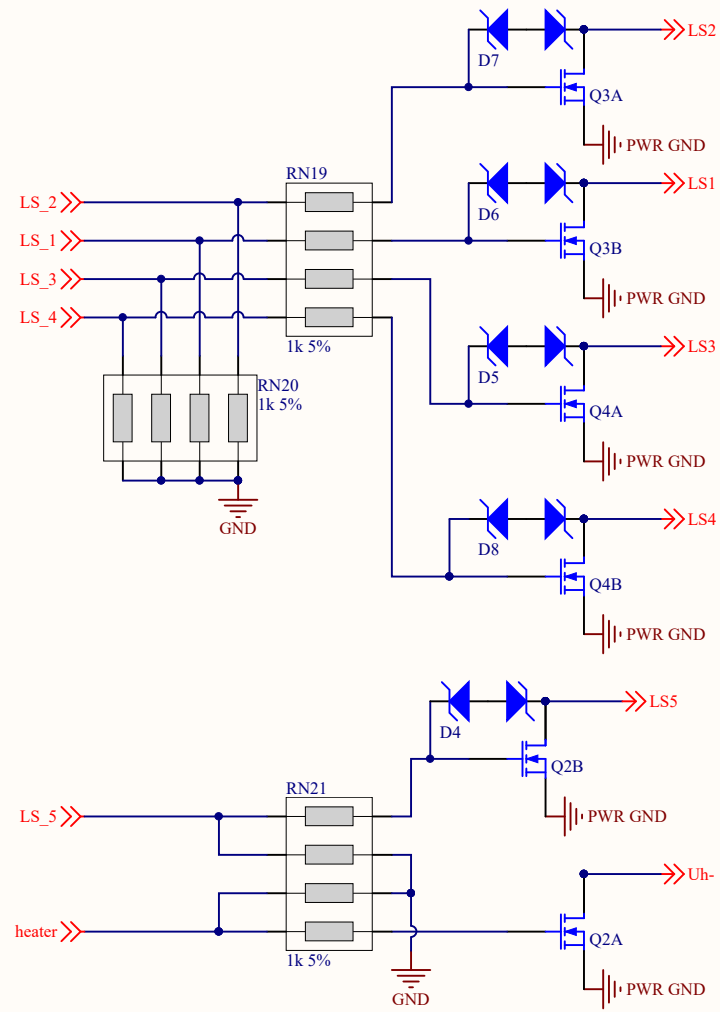

1

2

3

4

A

B

C

D

WARNING:
Use with "Open collector" mode only.

Passive coils: Non-inverted
Logic coils: Inverted

