

EFI Hardware Part Number: 855-2433

Product Update

FI114212 212 lb/hr
Deka IV Long Minitimer



Features


Fuel Compatibility	Standard Gasolines & Ethanol Flex Fuels
Fuel Pressure	300 kPa
Static Flow Rate	n-Heptane: 27.8 g/sec (220 lb/hr, 2433 cc)
Dynamic Flow Rate	n-Heptane: mg/pulse (53mg/pulse 2.5 ms PW, 20 ms Period)
Linear Flow Range (SAE)	8.43
Opening/Closing Time	1.5 ms / 1.3 ms
Coil Resistance	2.27 •
Injector Inductance	2.3 mH
SMOV/DMOV	4.4 V / 6.1 V
Connector	Minitimer
Spray Pattern	Pencil
Installation Compatibility	Deka I, IV Long, V Long, & VII Long Installation Compatible
Identification Shell Color	Red

Connector



Minitimer



Basic Dimensions

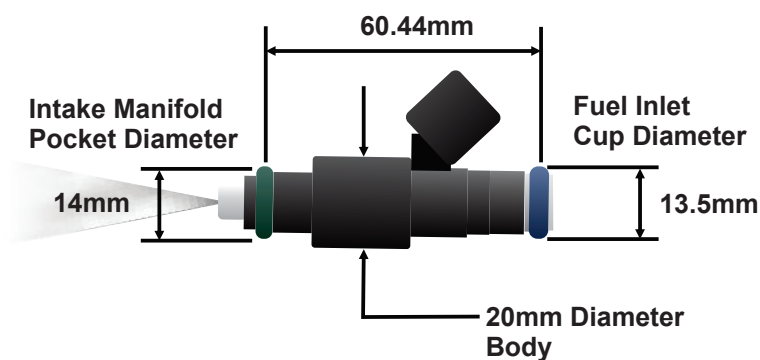


VDO

EFI Hardware Part Number: 855-2433


Spray Characteristics (4 Hole Orifice)

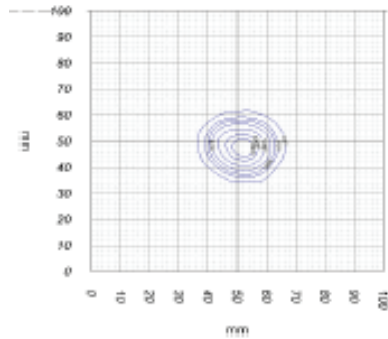

Voltage Sensitivity

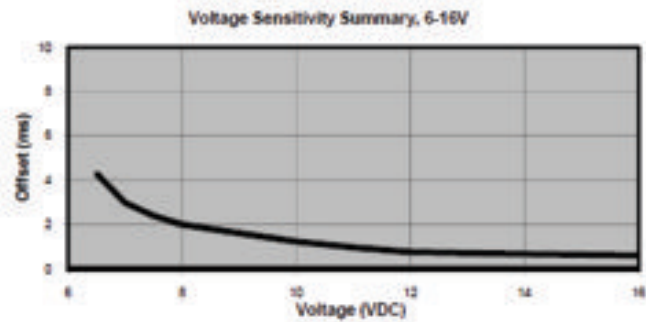

Characteristic Flow

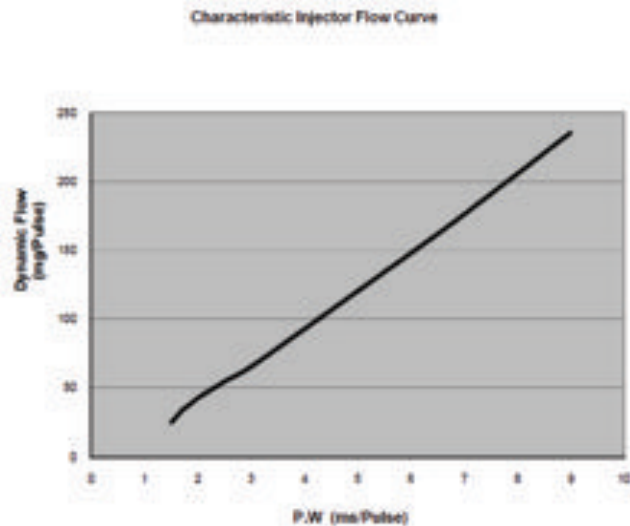

VDO